



4034 4 Street SE
Calgary, AB T2G2W3
(t)403.274.4556
(f)403.206.7295

Addendum No. 1
Page 1 of 3

Project No.: 18060

Date: December 14, 2018

Project: **GENERAL CONSTRUCTION CONTRACT FOR EARTHWORKS,
UNDERGROUND DEEP & SHALLOW UTILITIES, CONCRETE
CURBS & GUTTERS, ASPHALT PAVEMENT AND LANDSCAPE**

**MICHAEL THOMAS WAY EXTENSION
STEATFORD, PRINCE EDWARD ISLAND**

TOWN OF STRATFORD

The following information supplements and/or supersedes the bid documents issued on December 3, 2018.

This Addendum forms part of the contract documents and is to be read, interpreted, and co-ordinated with all other parts. The cost of all items contained herein is to be included in the contract sum. The following revisions supersede the information contained in the original drawings and specifications issued for the above-named project to the extent referenced and shall become part thereof. Acknowledge receipt of this Addendum by inserting its number and date on the Tender Form. Failure to do so may subject the Bidder to disqualification.

1. **Tender Closing Date & Time** – has been extended to Wednesday, December 19, 2018 at 2:00p.m. Deliver to Stratford Town Hall.
2. No responses will be provided by the Consultant for any questions received between now and tender closing.
3. EA Engineering Addendum #1 attached.

End of Addendum #1



ADDENDUM #1

**Michael Thomas Way
Charlottetown, PEI
EA Engineering Project Number: 18-080**

December 14, 2018

The following amendment to the tender documents is effective immediately. This addendum shall form part of the contract documents.

General

1. General:

1.1 Clarification: The light fixtures and bases are to be supplied by the Town of Stratford.

2. Reference Drawing E101 - Electrical Work and Specifications:


1.1 Refer to detail 6 - Primary Trench Detail:

.1 Primary trench to contain 4 runs of 6" conduit for power and 4 runs of 4" conduit for communications. To be complete with 2 runs of #2/0 AWG bare copper wire for grounding.

1.2 Bollards to be as shown in attached detail.

1.3 Wiring to each light fixture to be 2C#12 plus bond. Fixtures to be complete with fuse holder.

End of Addendum

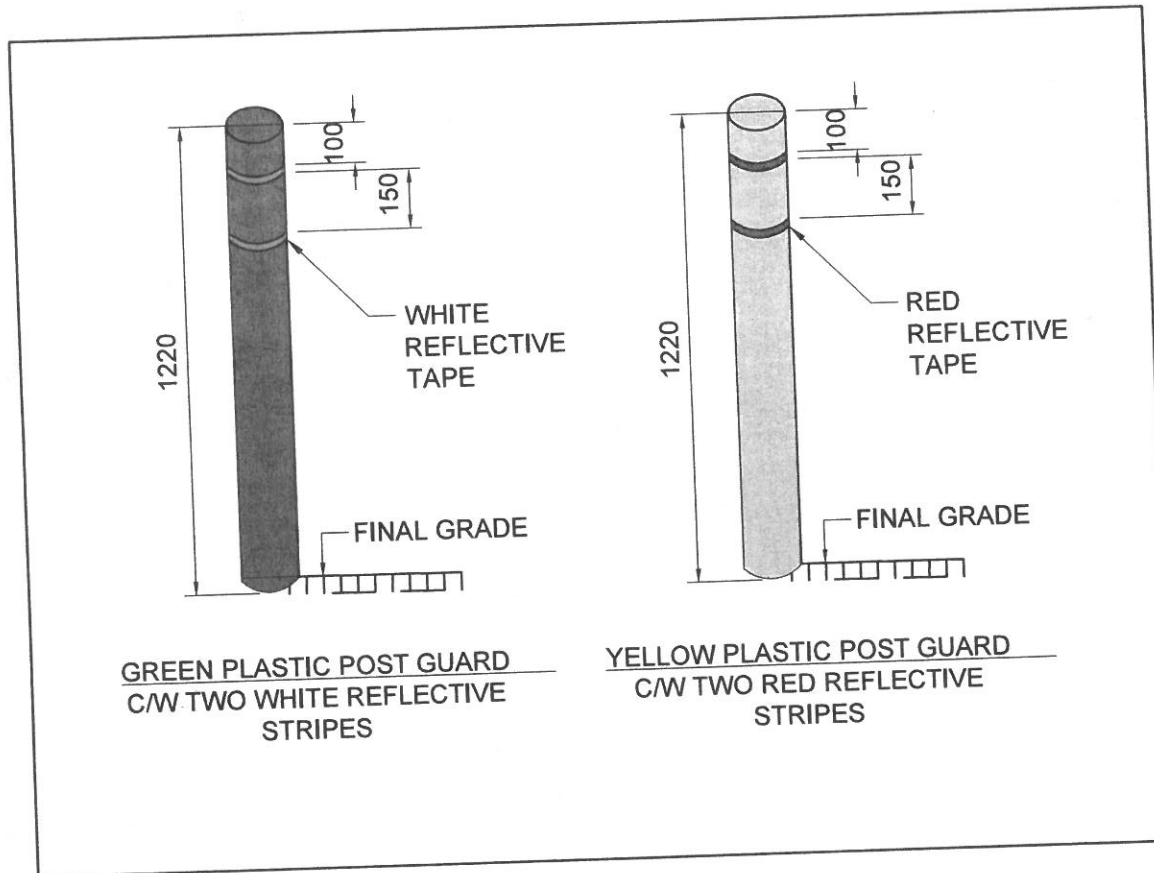

NOTES:

1. ONLY MECL APPROVED PLASTIC BOLLARD COVERS TO BE INSTALLED.
2. HDPE POST GUARD / SURE GUARD YELLOW C/W TWO REFLECTIVE RED STRIPES OR HDPE POST GUARD / SURE GUARD GREEN C/W TWO REFLECTIVE WHITE STRIPES CAN BE USED FOR BOLLARD COVERS ONLY.
3. THE WIDTH OF THE PLASTIC BOLLARD COVER IS 8 - 7/8 " AND HEIGHT IS 52 INCH.
4. BOLLARDS SHALL BE PLACED SO AS NOT TO OBSTRUCT ANY DOORS NOR RESTRICT THE OPERATION OF THE EQUIPMENT.
5. REFER TO DRAWINGS E-85-144, E-85-143 AND UG-18-01 FOR MORE DETAIL.